



## Vialed Evo

### High efficiency

Vialed is characterized for being a professional solution for public lighting projects, applied in all roadway configurations, the solution developed in the manufacturing center Construlita, favors the total control of the manufacturing quality processes of each product, where bodies or electronic systems of premium quality are implemented and even the detail applied to the assembly of LEDs, made to meet the criteria of acceptability of electronic assemblies, under the IPC-A-610 standard, the same level of quality required by the aerospace and military industry. The different configurations are UL certified, which provides each product with compliance to safety and quality standards that increase the competitiveness of the offer.

**Certifications:**



**Warranty:**

5 Years

### General technical data:

<b>Light source</b>	Built-in LED
<b>Nominal luminous flux (lm)</b>	6,300 - 16,250
<b>System Efficacy (lm/W)</b>	>125
<b>CCT</b>	4000K/ 5000K
<b>CRI</b>	70
<b>Beam angle</b>	Tipo II M
<b>Power</b>	50W/ 70W/ 90W/ 130W
<b>Input voltage</b>	127-277V~
<b>Input Frequency</b>	60 Hz
<b>Power factor</b>	>0.90
<b>Total Harmonic Distortion (THD)</b>	<10%
<b>Operating Temperature</b>	-20 to 50 °C
<b>Driver</b>	Integrated
<b>Control</b>	0-10V
<b>Lifespan / LED maintenance</b>	150,000h L70
<b>Housing</b>	Aluminium
<b>Lens material</b>	PMMA (Acrylic)
<b>Finish</b>	Electrostatic painting
<b>Color</b>	Grey
<b>IP</b>	66
<b>IK</b>	10
<b>Mounting type</b>	Pole

## Order information:



Code construction example:  
U1 050 UN 2M 40

Application	Consec.	Input Voltage	Beam Angle	CCT
U1	050	UN- 127-277 V~	2M- Type II M	40- 4000K
	070			
	090			
	130			
U2				

Power	Nominal luminous flux	CRI	Control	Dimensions
50W	6,200	70	0-10V	510*280*115 mm
50W	6,200	70	0-10V	510*280*115 mm
70W	8,100	70	0-10V	510*280*115 mm
70W	8,100	70	0-10V	510*280*115 mm
90W	9,850	70	0-10V	510*280*115 mm
90W	9,850	70	0-10V	510*280*115 mm
130W	16,250	70	0-10V	660*288*157mm
130W	16,250	70	0-10V	660*288*157mm


## Energy efficiency:

CODE	Nominal luminous flux (lm)	Power (W)	System Efficacy (lm/W)
U1 050 UN 2M 40	6,281	50	125.52
U1 050 UN 2M 50	6,281	50	125.52
U1 070 UN 2M 40	8,096	69	117.94
U1 070 UN 2M 50	8,096	69	117.94
U1 090 UN 2M 40	9,841	90	109.13
U1 090 UN 2M 50	9,841	90	109.13
U2 130 UN 2M 40	16,745	129.90	128.90
U2 130 UN 2M 50	16,745	129.90	128.90


## Input current:

Power (W)	Input current
50	0,397 - 0,190 A
50	0,397 - 0,190 A
69	0,560 - 0,270 A
69	0,560 - 0,270 A
90	0,560 - 0,270 A
90	0,560 - 0,270 A
129.90	1,044 - 0,478 A
129.90	1,044 - 0,478 A


## Photometric:




Vial Evo 50W Type  
IIM



Vial Evo 70W Type  
IIM




Vial Evo 90W Type  
IIM

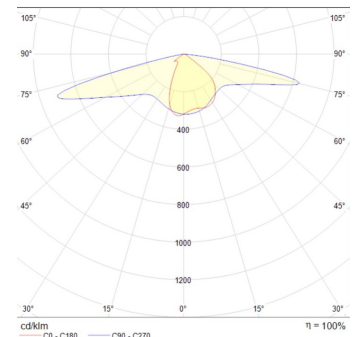


Vial Evo 130W Type  
IIM

## Product dimensions:



Vialed Evo 50W/ 70W/  
90W



Vialed Evo 130W

## Downloads:

[Go to downloads section](#)